

Prise 230V en caoutchouc avec interrupteur et protection thermique



The NOLTA Rubber Plug
for all one phase motors, e.g.:

- Pumps
- Buzz saws
- Industrial motors



Prise 230V en caoutchouc avec interrupteur et protection thermique

The NOLTA Rubber Plug is equipped with an over-current release up to 16 A at a rated voltage of 250 V. This type is also available as a rubber plug, without an integrated on/off switch.

Available Versions

Connector plug **with** motor protection **without** On/Off switch:

Nominal current	Article No.
0.5 A	81 0305
0.8 A	81 0308
1.0 A	81 0310
1.2 A	81 0312
1.5 A	81 0315
1.8 A	81 0317
2.0 A	81 0318
2.5 A	81 0320
3.0 A	81 0321
3.5 A	81 0322
4.0 A	81 0323
4.5 A	81 0324
5.0 A	81 0325
5.5 A	81 0326
6.0 A	81 0327
7.0 A	81 0328
8.0 A	81 0329
8.5 A	81 0330
9.0 A	81 0331
10.0 A	81 0332
11.0 A	81 0333
12.0 A	81 0334
13.0 A	81 0335
14.0 A	81 0336
15.0 A	81 0337
16.0 A	81 0338

Connector plug **with** motor protection **with** On/Off switch:


Nominal current	Article No.
0.5 A	81 1305
0.8 A	81 1308
1.0 A	81 1310
1.2 A	81 1312
1.5 A	81 1315
1.8 A	81 1317
2.0 A	81 1318
2.5 A	81 1320
3.0 A	81 1321
3.5 A	81 1322
4.0 A	81 1323
4.5 A	81 1324
5.0 A	81 1325
6.0 A	81 1327
7.0 A	81 1328
8.0 A	81 1329

Rubber plug **without** motor protection **with** On/Off switch:

Description	Article No.
Rubber plug with On/Off switch max. 6 A	81 0358
Rubber plug with On/Off switch max. 8 A	81 0360

Technical data subject to change

Tripping Characteristics

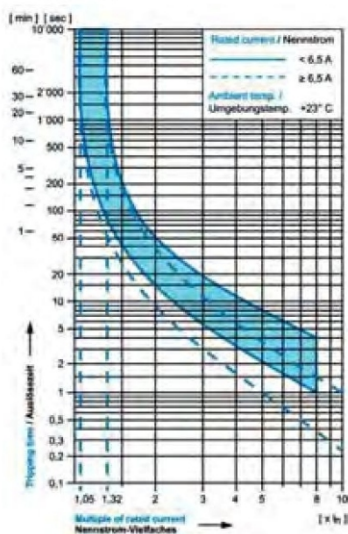

Technical data:

Housing material: NBK
 Protection class: IP 44
 Length: 100 mm
 Width: 57 mm
 Height: 85 mm
 Weight: approx. 200 g

■ Other plug types available upon request